

Door Handle Magnetic Lock

Application scenario



Enterprise



Institution



Supermarket



Apartment



Hotel




- Built-in push button and power indicator light. Adjustable door opening time (0~9 seconds.)
- Install at the center of the door leaf to prevent deformation whenever it is locked or unlock.
- External installation without knocking any holes out.
- Standalone operation when power is on and it does not need to be controlled by proximity reader.
- Monitor output with Hall Effect for its stability and high accuracy.

Specification


Power Supply	DC 12V or DC24V $\pm$ 15% 450mA@12VDC
Operation current	mA 10% $\pm$ 235mA@24VDC mA 10%
Application	All types of 90° pull door
Holding forces	600lbs(250Kg)
Delay Time	0,3,5,9 Sec.
Open door contact	Photo coupler contact
Lock status sensor	N.C. & N.O. Output (1A@30VDC)
Indicator	Double-colored LED light
Demagnetizer design	Instant demagnetizer when power is off.
Operation temperature	40°C $\pm$ 5°C(Room temperature 30°C)
Weight	3000g (included wrapping)

Dimensions

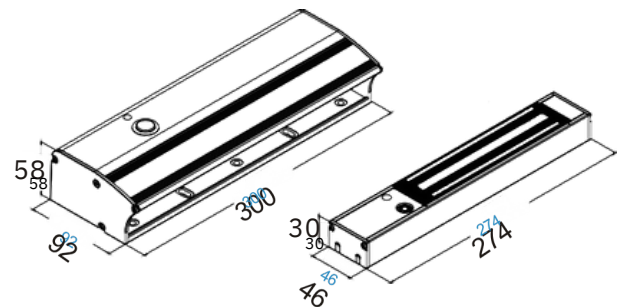


Unit: mm

Related products




Optional plate (thickness of 3.6mm) is available to achieve optimum height of both door frame and door leaf when the unit is installed.

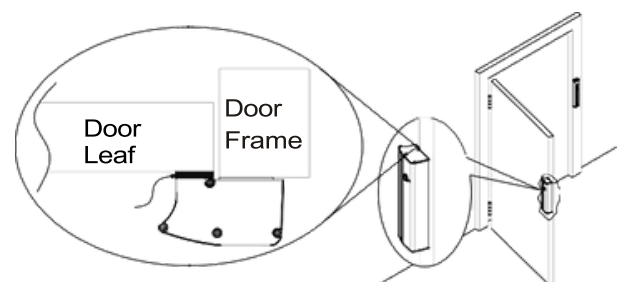


Structure diagram

【 Left opening door 】

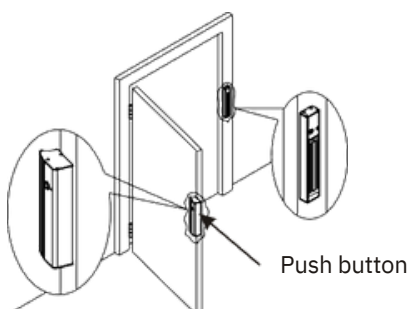

【 Right opening door 】

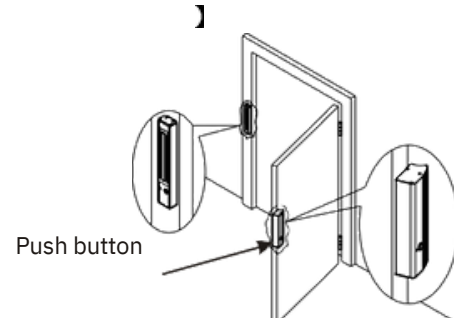

Push button

Push button