


EVEN UHF Fixed Reader

SI-FR815

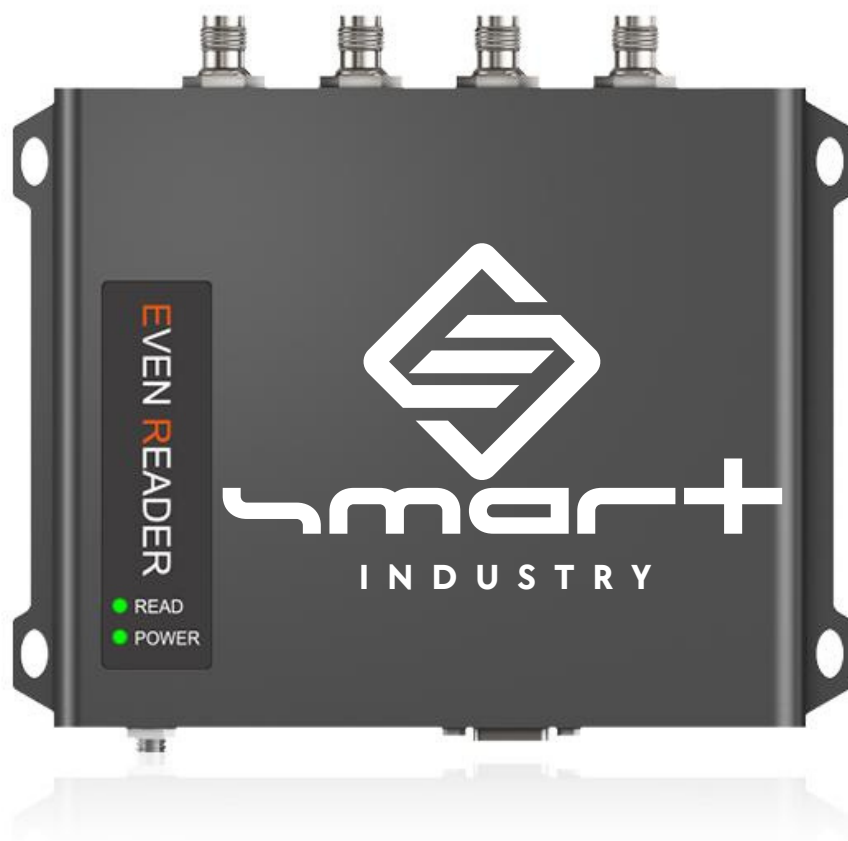

Features

Impinj E710 chip engine

Max inventory speed 800 tags/s

Support multi-antenna ports anti-collision polling inventory

Support RSSI recognize tags signal distance

Support multiple c#,java,vc language for development

Applications: Warehouse Inventory management, Production control ,

Asset tracking, laundry management , intelligent cabinet , waste collection management etc.

Products Specification

RFID Technical Parameter		Data Communication	
Engine	Impinj E710 chip	Standard Interface	USB 、 RS232 、 RS485 TCP/IP
Frequency	902~928MHz (US) 865~868MHz (EU)	Customized Interface	POE (mode A/mode B af)
Protocol	ISO18000-6C (EPC GEN2)	GPIO interface	2 sets of GPI & 2 sets of GPO
RF Output Power	0dbm—33dbm(adjustable)	Antenna Port	4 Channel RP TNC Female
Inventory speed	800 tags/s	Power Supply	12V 2A
Data Cache	600pcs @ 128bits EPC	Current consumption	0.5~1.2A
Reading Distance	0—25 meter	Development Environment	
Anti-collision	Multi-antenna ports polling fast inventory	SDK	Include Demo software, API,Sample,User Manual
Work Mode	Active mode Answer mode	Development language	Support C#, java-jni, java-linux,VC,Android
RSSI	Support	Hardware Firmware	Support Remote upgrade
Physical Specification		Working Environment	
Material	Die-cast Aluminum	IP grade	IP55
Dimension	184*161.7*26mm	Operating temperature	-10-+60℃
Net Weight	0.6kg	Storage temperature	-20-+75℃
Package size	200*255*100mm		
Gross weight	1.3kg		

Related Products

Photo			
Model Number	SI-FR815	SI-FR816	SI-FR817
Engine	Impinj E710 Chip		
Output RF power	0dbm ~33dbm (adjustable)		
Inventory Speed	800pcs/s		
Reading Distance	0~25 meter (depends on antenna & tag & application)		
Antenna ports	4 channel RP TNC Female	8channel SMA Female	16channel SMA Female